

Guard Rail Stand Set-Up FACT SHEET


DICKE

Since 1886

Stands available for mounting 36" and 48" roll-up and rigid signs to standard guard rails.

Set-Up: Spring and Non-Spring Models

1. On first use, install **Top and Bottom Rail Clamps** onto **Mounting Mast**. To maintain its stationary position, insure that the **"T" Screw** on the **Top Rail Clamp** engages the hole in **Mounting Mast**. (Detail 1)
2. Hook the **Top Rail Clamp** over the top of the guard rail.
3. Loosen **Bottom Rail Clamp** and slide up against the bottom of the guard rail.
4. Tighten the **Bottom** and **Top Rail Clamps** using the **"T" Screws**.
5. On first use, install sign holder bracket(s)(not shown) on **Mast**. Drop the **Mast** into the **Mast Socket Tube**, secure with two **Locking Pins**.
6. For take-down, reverse set-up procedure.

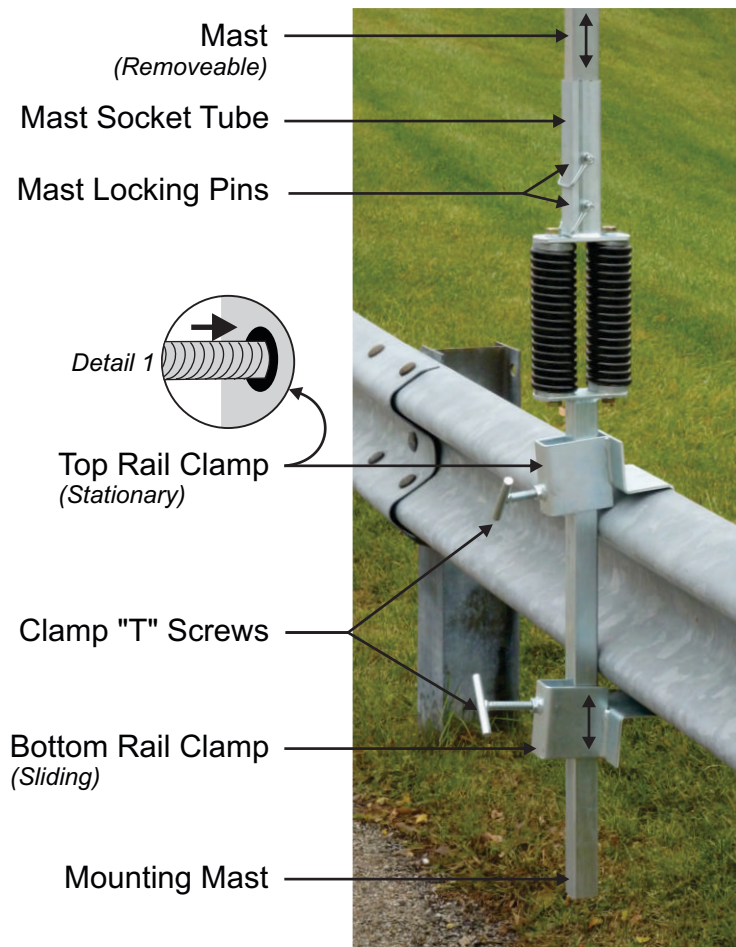

GR-TF18RUB



DICKE SAFETY PRODUCTS

www.dicketool.com

Illinois - 1201 Warren Avenue • Downers Grove, IL 60515 • Ph: 630.969.0050 • Fax: 630.969.3973
Oregon - 1845 Anunsen Street, N.E. • Salem, OR 97301 • Ph: 800.333.5641 • Fax: 503.364.0340