



# Top Laddermate™ (LM200)

## PROCEDURES FOR USE - Installation on Pole

Properly position ladder as shown. If the ground is uneven, a ladder leveling wedge should be used. Be sure to leave at least 12" of clearance between the top of the ladder and any obstruction. Properly install bottom Laddermate (#LM100) according to **Laddermate Procedures For Use**.

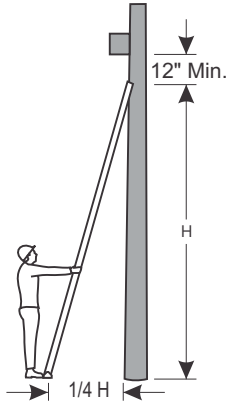

## Securing the top of the ladder with Top Laddermate :



1. After securing the bottom of the ladder with the bottom **Laddermate (#LM100)**, ascend the ladder to the top and secure yourself with your body belt.




3. Wrap the opposite end of the strap away from you, around the backside of the pole and attach to the opposite rail below the top rung.




2. Attach the **Top Laddermate** to the left side rail (right side if left handed) below the top rung in the same manner as the bottom **Laddermate**.




4. Reach behind the pole, grasp the free end of the strap and pull to snug. Be sure to pull away from your body and the pole (your body should lean "into" the pole).



Attach to left rail



Around back of pole then attach to right rail.



Pull free end of strap to snug.

## Removal:

With your body belt still secured, activate the release on the cam buckle. This will allow sufficient slack to be obtained to release the buckles and remove the **Top Laddermate**.

**Always follow proper safety procedures for working with ladders on strand!**

DICKE SAFETY PRODUCTS  
1201 WARREN AVENUE – P.O. BOX 518 – DOWNERS GROVE, IL 60515  
PH: 630-969-0050 – FAX: 630-969-3973 www.dicketool.com



# Top Laddermate™ (LM200)

## PROCEDURES FOR USE - Installation on Strand

### Securing the Ladder to Suspension Strand - Ladders With Hooks



1. Position ladder using proper procedure, carefully ascend and secure yourself with the body belt.



2. Start with cam-buckle side. Run out strap all the way to allow use of full length of strap. Attach loop opposite cam-buckle to ladder rail below first rung.



5. Attach remaining loop to ladder to ladder rail below second rung

6. Tighten strap by alternately pulling on free end (pull “away” from your body and the ladder) and working slack toward cam-buckle.



3. Feed entire strap up and around strand one full wrap, directly next to hook.




7. To release, depress button on cam-buckle and extend strap to allow locking buckles enough slack to be released. Be sure to secure to strand with your body belt first.



4. Cross strap over front (top) of hooks and make one full wrap around the strand directly next to and outside the opposite hook.

Note: **Do Not** move the base of the ladder after the upper end has been secured to the strand.

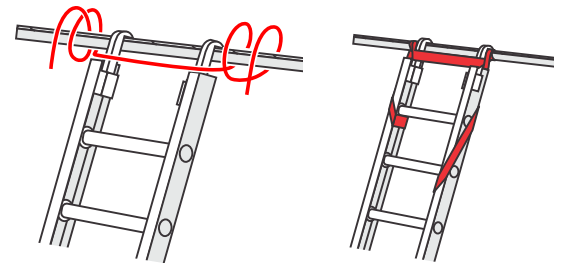

### Securing the Ladder to Suspension Strand - Ladders Without Hooks

1. After following all proper safety procedures for placing the ladder to strand, carefully ascend and secure yourself with the body belt.


2. Start with cam-buckle side. Run out strap all the way to allow use of full length of strap. Attach loop opposite cam-buckle to ladder rail below third rung.

3. Feed entire strap up and around second rung and strand three full wraps, keeping snug as possible.

4. Attach remaining loop to ladder rail below third rung.

5. Tighten strap by alternately pulling on free end (pull “away” from your body and the ladder) and working slack toward cam-buckle.

6. To release, depress button on cam-buckle and extend strap to allow locking buckles enough slack to be released. Be sure to secure to strand with your body belt first.



Note: **Do Not** move the base of the ladder after the upper end has been secured to the strand.


**Always follow proper safety procedures for working with ladders on strand!**

# Top Laddermate™ (LM200)

## PROCEDURES FOR USE - Installation on Strand (Cont.)



### For Ladder Styles 1A and 1AA with V-Rung and Hook Assembly

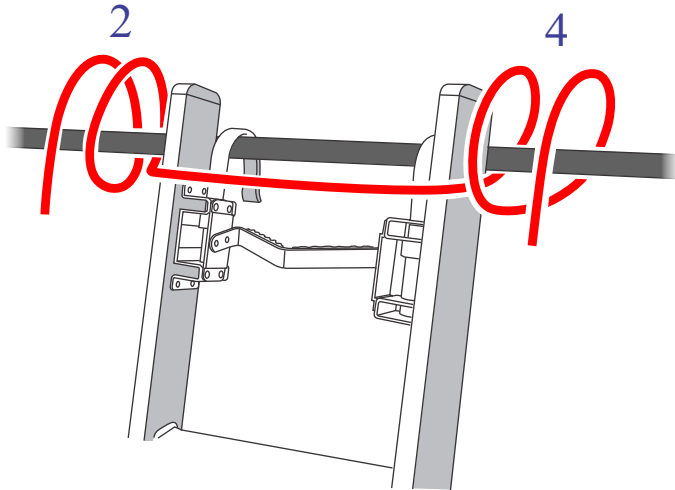


1. Position ladder using proper safety procedures for placing the ladder on a strand, carefully ascend and secure yourself with the body belt.

2. Start with the cam-buckle, left side. Loop the strap around the strand two full wraps and secure hardware. Slide against the left ladder rung and pull snug.

3. Pull strap across ladder rails avoiding any twist.

4. Loop the strap around the strand on the right side two full wraps and secure hardware. Slide against the right ladder rail and pull snug.

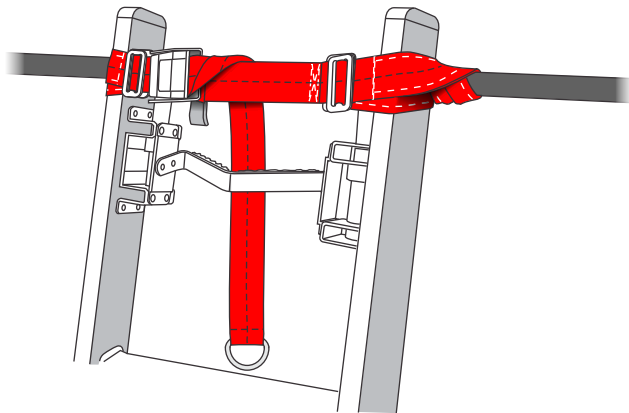

5. Tighten strap by pulling on the free (D-ring) end and working slack toward the cam buckle.

6. To release, lift the lever on cam-buckle and extend strap to allow locking buckles enough slack to be loosened and unhooked.

Note: **Do Not** move the base of the ladder after the upper end has been secured to the strand.

10/15/2013

**Always follow proper safety procedures for working with ladders on strand!**

DICKE SAFETY PRODUCTS  
1201 WARREN AVENUE – P.O. BOX 518 – DOWNERS GROVE, IL 60515  
PH: 630-969-0050 – FAX: 630-969-3973    www.dicketool.com

