


TwinFlex™ Sign Stands For Rigid and Roll-Up Signs



MAX HEIGHT

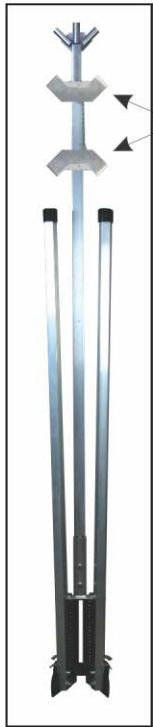


TF84-RGB
in storage
configuration



Rigid Sign
Brackets




Roll-Up Sign
Bracket

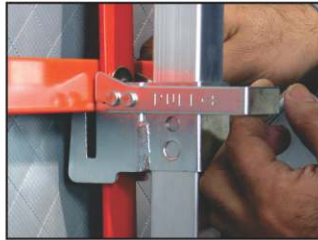

Roll-Up Sign Bracket



Dual heavy duty springs flex for wind relief

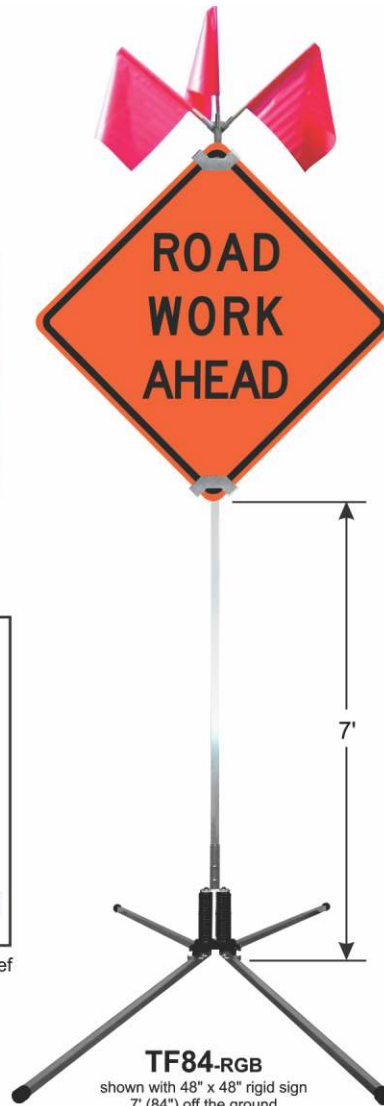

TF84-RGB
shown with 48" x 48" rigid sign
7' (84") off the ground



TF60-RGB
shown with 48" x 48" rigid sign
5' (60") off the ground

Models and Features

MODEL	SIGN TYPE	DISPLAY HEIGHT*	OPEN FOOTPRINT	WEIGHT LBS.
TF60-RUB	Roll-Up	5'	75" x 134"	45
TF60-RGB	Rigid	5'	75" x 134"	48
TF60-RG/RU	Roll-Up & Rigid	5'	75" x 134"	49
TF84-RUB	Roll-Up	7'	75" x 134"	46
TF84-RGB	Rigid	7'	75" x 134"	49
TF84-RG/RU	Roll-Up & Rigid	7'	75" x 134"	50

*Display height measured from bottom of 48" sign to the ground

- All stands meet **MUTCD** specifications and are **NCHRP-350** compliant.
- Aircraft quality aluminum and steel construction.
- Quick set-up and tear down with step release system for leg deployment.
- Aluminum legs feature anti-skid foot pads and three position height adjustment for uneven terrain.
- Dual heavy duty vertical coil springs provide stability in strong winds. Springs are **E-Coat** treated for superior corrosion resistance and durability.
- All stands will display diamond, square, rectangular, and octagonal signs.
- Models available for roll-up signs only, rigid signs only, or with brackets to accommodate both.



DICKE SAFETY PRODUCTS

www.dicketool.com

Illinois - 1201 Warren Avenue • Downers Grove, IL 60515 • Ph: 630.969.0050 • Fax: 630.969.3973
Oregon - 1845 Anunsen Street, N.E. • Salem, OR 97301 • Ph: 800.333.5641 • Fax: 503.364.0340