


TF60 Stands for Roll-Up & Rigid Signs

FACT SHEET



Features:

- Meets MUTCD specifications, NCHRP-350 compliant.
- Aluminum and steel construction.
- Quick set-up and tear down with step release system for leg deployment.
- Aluminum legs have two position height adjustment and anti-skid foot pads.
- Features two heavy duty vertical coil springs for stability in strong winds.
- **TF60-RUB** displays 36" and 48" roll-up signs.
- **TF60-RGB** displays 36" and 48" rigid signs.
- **TF60-RG/RU** comes with brackets to display roll-up and rigid signs.
- Standard height from ground to bottom of a 48 sign: 60"
- Open footprint: 75" x 134"
- Closed storage dimensions: 8" x 8" x 69"
- Weight: **TF60-RUB & TF60-RGB** - 48 lbs., **TF60-RG/RU** - 50 lbs.

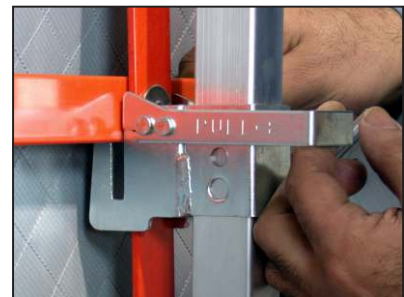

TF60-RUB
roll-up sign bracket



DICKE SAFETY PRODUCTS

www.dicketool.com

Illinois - 1201 Warren Avenue • Downers Grove, IL 60515 • Ph: 630.969.0050 • Fax: 630.969.3973
Oregon - 1845 Anunsen Street, N.E. • Salem, OR 97301 • Ph: 800.333.5641 • Fax: 503.364.0340